


556 Grip Top

MODULAR BELTS

Modular belt with over-molded high-grip rubber, for inclines, declines or acceleration applications, guaranteeing high performances and superior durability.

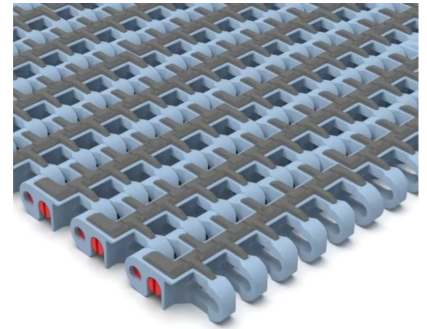

Sideflexing Modular Belt LFA 556 GT W 6'''

Article-Nr: P5433010006A

Technical features

Series	556
Pitch	25.4 mm
Thickness	12.7 mm
Increments	3" - 76,2 mm
Surface Type	GT - Grip Top
Functionality	Side-Flexing
Unit of measure	Meter
Width:	6" (152,4 mm)
Material:	LFA - Low friction acetal (01)
Version:	A - No tab/positioners
Part:	P5433
Back flex radius:	25 mm
Max working load:	30000 N/m
Mass:	7.7 kg/m ²
Temperature range dry:	-40÷80 °C
Temperature range wet:	-40÷65 °C

Pin material:	PBT white
Fixation:	Snap-in Clip
Box:	10 ft - 3,048 m
Supplementary informations:	Specific Curve Max. Working Load - 2000N
	Min. Radius 290 mm
	Open Surface 25,0 %

